



## Loaded with powerful features

Strength, durability, and performance are at the core of this small chassis dryer.

### SMART DESIGN FOR A BETTER EXPERIENCE

- Extra Large Capacity for Families and Bulky Items
- Extra Large Door for Easy Loading
- 4 Dry Options: High, Medium, Low, and No Heat
- Fast Dry Times

Built with professional-grade components and technology for superior energy efficiency, reliability, and results.

### SIGNATURE FEATURES

- Extra Large 22 lb Capacity
- 7.7 cu. ft. Drum
- Drum Supported by 5 Roller Bearings for Long Life
- Easy to Clean, Heavy-Duty Lint Screen
- Space-Saving Design
- Easy to Install
- Stacking Kit Available
- Available in Gas and Electric
- Coin and Card Compatibility
- 3-Year Parts Warranty

### RATING

- ADA Compliant \*
- CSA Certified
- Proposition 65 Compliant



### AXIAL AIRFLOW

Highly efficient axial airflow system and tight construction result in extremely low energy usage and faster dry times.



### ROLLER SUPPORTED TUMBLER


Innovative support rollers improve drum stability, ensure quiet operation, and extend the life of the machine.



### TIME-OF-DAY PROMO PRICING

Easily programmable for multiple promotional events or happy hour pricing using the built-in real-time clock.

SPECIFICATIONS	
Gas Dryer	DLHF0315GC2 (coin) DLHF0315GC2DC (card) DLHF0315GC2OPL (OPL)
Electric Dryer	DLHF0315EC2 (coin) DLHF0315EC2DC (card) DLHF0315EC2OPL (OPL)
Capacity – lb (kg)	22 lb (10 kg)
Cylinder Volume – cu. ft. (liters)	7.7 cu. ft. (218 l)
Dry Options	High, Medium, Low, No Heat
Motor	1/3 HP
Electrical Rating – v/Hz/Ph	120 V/60 Hz/1-phase (gas models) 208-240V/60 Hz/1-phase (electric models)
Breaker Requirements – Amps	15 A (gas heat models) 30 A (electric heat models)
Airflow	192 CFM
Gas Heating	19,000 BTU/hr
Electric Heating	5.0 kW
Gas Connection	3/8 in MNPT
Tumbling Speed	50 RPM
Exhaust Connection	4 in (diameter)
Crated Weight – lb (kg)	173 lb (78.5 kg)
Uncrated Weight – lb (kg)	158 lb (71.7 kg)

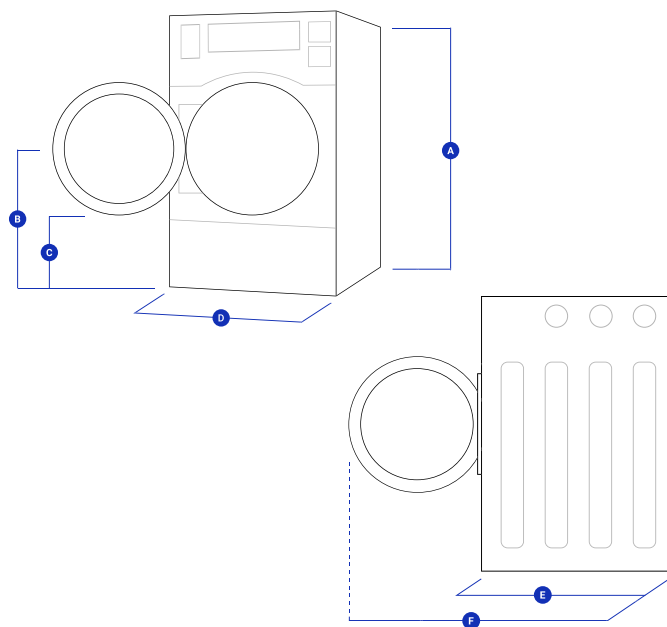

EQUIPMENT DIMENSIONS	
A. Overall Height – in (mm)	42 ½ in (1080 mm)
B. Height to Center of Door – in (mm)	23 in (584 mm)
C. Height to Bottom of Door – in (mm)	12 in (305 mm)
D. Overall Width – in (mm)	27 in (686 mm)
E. Overall Depth – in (mm)	29 in (737 mm)
F. Depth w/ Door Open 90° – in (mm)	51 ½ in (1308 mm)

### COMPLIMENTARY PRODUCTS

6" Dryer Base (optional)	096511
Front Load Washer	WHLFP715C2FMI (coin) WHLFP715C2DC (card) WHLFP715C2OPL (OPL)
Top Load Washer	WMTW4371C2FMI (coin) WMTW4371C2DC (card) WMTW4371C2OPL (OPL)

Actual color may vary. Dimensions are for planning purposes only.

Refer installation and servicing to qualified, licensed personnel. Always read Installation and Operating Manuals and consult local codes before installation. Protect machines with properly rated circuit breakers ONLY. Warranty void if not properly installed.

Because of continuous product improvement, specifications are subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.

\* ADA compliant when mounted on the floor or on a base up to 6 inches high.